



EMAS ELEKTROTEKNİK MAKİNA  
SANAYİ VE TİCARET A.Ş


İkitelli Organize Sanayi Bölgesi Mah. Atatürk  
Bulvarı No:50/A 34490 Başakşehir / İstanbul /  
TÜRKİYE

Telefon : +90 212 549 22 52

Faks : +90 212 549 25 80

Web : www.emasas.com.tr

Technical Specifications : PV3753

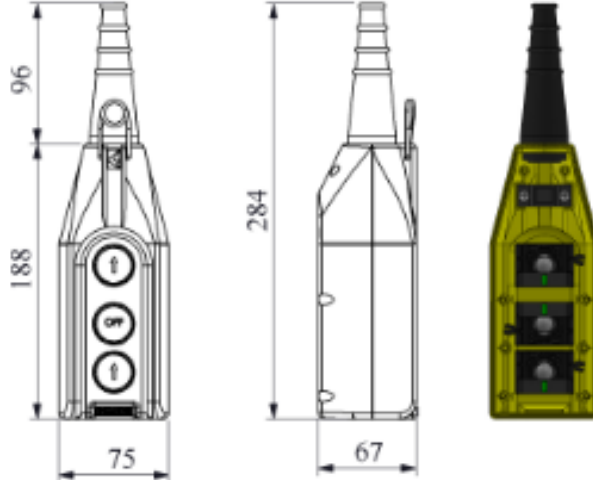

Technical Information :

#### Body:

- Suitable to  $\Phi 22$ mm push buttons,
- Aesthetic look and ergonomic usage with assistance of ABS reinforced material,
- Mechanical protection preventing operation in opposite direction at same moment,
- Maximum resistance to environment conditions with waterproof body and buttons,
- Flexible cable pipe,
- Easy assembly,
- Emergency Push Button for usage in dangerous situations.

#### General Specification

Operating Temperature	min. / max. °C -15 / +80
Mechanical Life (Operating Frequency)	500.000 operations min. Without load 3000 operations / hour )
Electrical Life (Operating Frequency)	100.000 operations min. At full load 1200 operations / hour)
PV Block Tightening Torque	1.5Nm
Pv Block Connection Profile	Min:1.5mm <sup>2</sup>
Wire Profile	Max.2.5mm <sup>2</sup>
Protection Degree	IP65

#### Standards:

- TS EN 60947 -5-1

In Contact Blocks;  
VDE 0660 UL508



Push Buttons:



Electrical Information:

**General Specifications**

Range Of Use		AC15
Rated Operating Voltage	Ue	230V AC
Rated Operating Current	Ie	4A
Insulation Voltage	Ui	300V
Stroke Resistance Voltage	Uimp	2.5kV
Dielectrical Strenght		1500V AC
Insulation Resistance		10M $\Omega$ min. (500V DC)