



JD6

### Specifications:

IEC947-4-1, VDE0660

Rated Operational Current: AC-3: 9A  
AC-1: 25A

UL508, E215185

Ue	240	400	V~
Ie	9.6	6.1	A

Rated Operational Voltage:  $U_e \leq 440V \sim$   
 Rated Insulation Voltage:  $U_i \geq 1000V \sim$   
 Frequency Limits: 25...60Hz  
 Electrical Life:  $5 \times 10^5$  Cycles  
 Ambient Air Temperature:  $-20^\circ C \dots +50^\circ C$   
 Short Circuit: Rating 5000A at 240v  
 DC rating: 24VDC

### 参数:

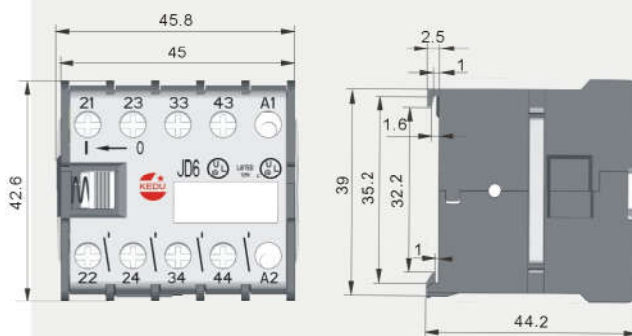
IEC947-4-1, VDE0660

额定操作电流: AC-3: 9A  
AC-1: 25A

UL508, E215185

Ue	240	400	V~
Ie	9.6	6.1	A






额定操作电压:  $U_e \leq 440V \sim$   
 额定绝缘电压:  $U_i \geq 1000V \sim$   
 频率范围: 25...60Hz  
 电气寿命:  $5 \times 10^5$  Cycles  
 周围环境温度:  $-20^\circ C \dots +50^\circ C$   
 短路电流: 5KA 240V~  
 直流额定值: 24VDC



Available Switch Options. 货号编制:

**Type:** 型号: JD6

**Art. No.:** 货号: 12061+

Voltage/Frequency 电压/频率	Function 功能	Terminal Type 端子类型	Accessories 附件
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>
<b>01</b> 110V~/50Hz	<b>01</b> 3NO 	<b>1</b> Screw Type 螺钉	<b>01</b> None 无附件
<b>02</b> 110V~/60Hz	<b>02</b> 4NO 		
<b>03</b> 230V~/50Hz	<b>03</b> 2NO+1NC 		
<b>04</b> 230V~/60Hz	<b>04</b> 2NO+2NC 		
<b>05</b> 400V~/50Hz	<b>05</b> 3NO+1NC 		
<b>06</b> 400V~/60Hz			
<b>07</b> 24VDC			
<b>08</b> 240V~/50Hz			
<b>09</b> 240V~/60Hz			