


DG238-10.0



HOW TO ORDER

PDF Descargar

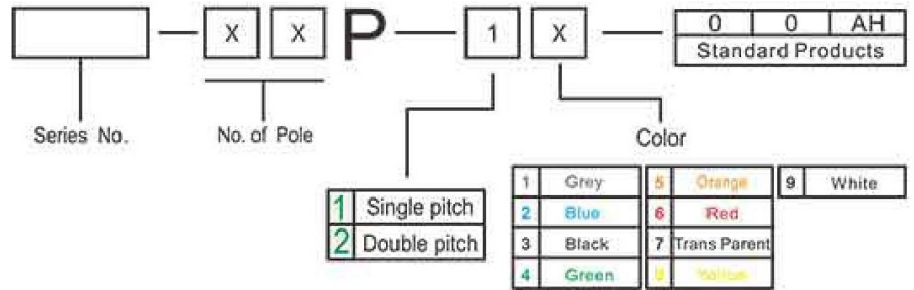

Item	Data		
APPROVAL			
Test standard	IEC/EN60998-1:2004/ UL1059		
Pitch [mm]	10.0		
Poles	02-05P		
EN60998 Test data	VDE certificate NO. 40025914		
Rated voltage [V]	450		
Rated current [A]	24		
Rated connection capacity(solid/stranded) [mm²]	0.75-2.5		
Surge voltage category/pollution degree/material group	III/2/I		
工频耐压(Withstanding Voltage) [KV/min]	2.5		
Rated torque [N.m]	/		
UL1059 Test data	UL1059		
Use group	B	C	D
Rated voltage [V]	600	/	/
Rated current [A]	20	/	/
Rated connection capacity (solid/stranded) [AWG]	22-12		
Rated torque [Lb. in]	/		
General data	/		
Screw	/		
Inflammability class UL94	V0		
Ambient temperature [°C]	-40~+105		
Relative humidity	5%-95%		
Inspection standard	MIL-STD-105E II		
AQL	0.65		
Warranty	12 months		
Material and plating	/		
Housing	PA66		
Clamp riveting joint spring	Stainless		
Wire connecting			
Recommended stripping length 9-10mm;			
1.For solid wire, stripping wire to the appointed length . press button and insert the wire.			
2.For stranded wire: stripping wire to the appointed length, mating with corresponding type of ferrule, then tightening with rated torque.			