


Cable Ties



Self-locking nylon cable ties

- Material: Nylon 66, 94V-2 certified by UL Heat-resisting Acid & erosion control, insulate well and not apt to age.
- Operating temperature: -35°C to 85°C.
- Color: Natural (or white, standard color), UV black and other colors are available as requested.

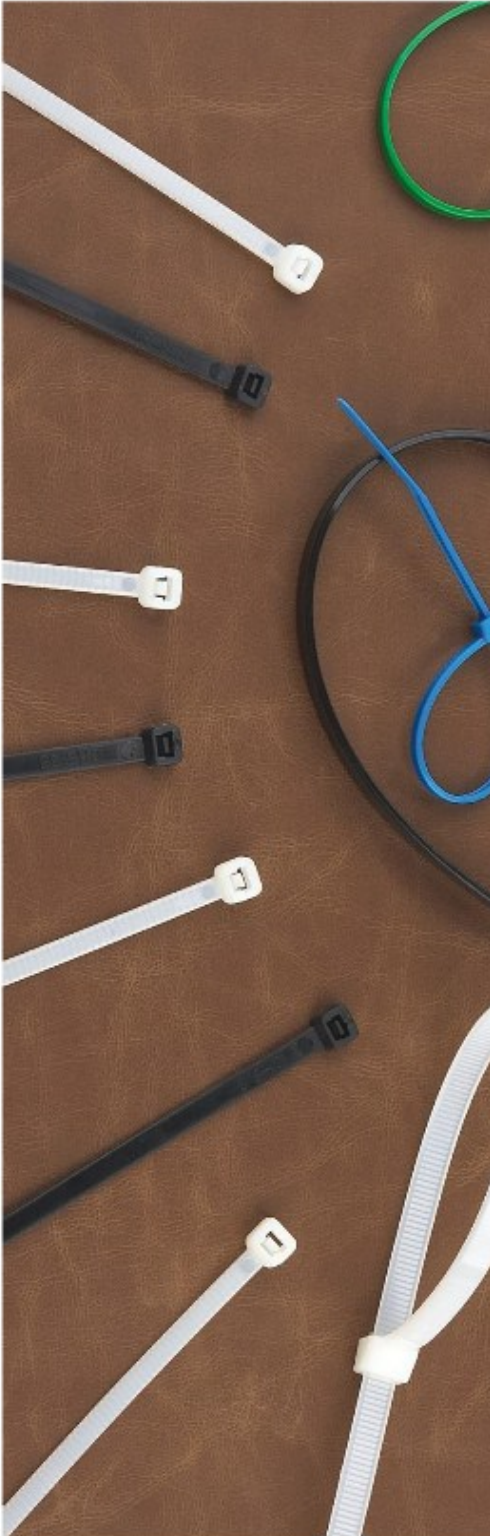


Underwriters
Laboratories Inc.
File E 203148

* W=white & natural
BR=Brown
OR=Orange
GN=Green
PP=Purple

B=Black
RD=Red
YL=Yellow
BL=Blue
GY=Gray

ITEM NO.	L		W (mm)	Bundle diameter E (mm)	Min. loop tensile strength	
	INCH	MM			LBS	KGS
CHS-3×60	2 3/8"	60	2.5	2-11	18	8
CHS-3×80	3 3/16"	80	2.5	2-16	18	8
CHS-3×90	3 5/8"	90	2.5	2-18	18	8
CHS-3×100	4"	100	2.5	2-22	18	8
CHS-3×120	4 3/4"	120	2.5	2-30	18	8
CHS-3×140	5 1/2"	140	2.5	2-33	18	8
CHS-3×150	6"	150	2.5	2-35	18	8
CHS-3×160	6 1/4"	160	2.5	2-40	18	8
CHS-3×200	8"	200	2.5	3-50	18	8
CHS-4×100	4"	100	3.5	3-22	40	18
* NEW CHS-4×120	4 3/4"	120	3.5	3-30	40	18
CHS-4×140	5 1/2"	140	3.5	3-33	40	18
CHS-4×150	6"	150	3.5	3-35	40	18
CHS-4×180	7"	180	3.5	3-42	40	18
CHS-4×200	8"	200	3.5	3-50	40	18
CHS-4×220	8 5/8"	220	3.5	3-58	40	18
CHS-4×250	10"	250	3.5	3-65	40	18
CHS-4×280	11"	280	3.5	3-70	40	18
CHS-4×300	11 5/8"	300	3.5	3-80	40	18
CHS-4×370	14 1/2"	370	3.5	3-102	40	18
CHS-5×120	4 3/4"	120	4.5	3-24	50	22
CHS-5×180	7"	180	4.5	3-42	50	22
CHS-5×190	7 1/2"	190	4.5	3-46	50	22
CHS-5×200	8"	200	4.5	3-50	50	22
CHS-5×250	10"	250	4.5	3-65	50	22
CHS-5×280	11"	280	4.5	3-70	50	22
CHS-5×300	7 8/5"	300	4.5	3-82	50	22
CHS-5×350	13 3/4"	350	4.5	3-90	50	22
CHS-5×380	15"	380	4.7	3-102	50	22
CHS-5×400	15 3/4"	400	4.7	3-105	50	22

Cable Ties



ITEM NO.	L		W (mm)	Bundle diameter E (mm)	Min. loop tensile strength	
	INCH	MM			LBS	KGS
CHS-5 × 430	17"	430	4.7	3-110	50	22
CHS-5 × 450	17 3/4"	450	4.7	3-130	50	22
CHS-5 × 500	19 1/16"	500	4.7	3-150	50	22
CHS-8 × 150	6"	150	6.8	3-33	65	38
CHS-8 × 180	7"	180	6.8	3-42	65	38
CHS-8 × 200	8"	200	6.8	3-50	65	38
CHS-8 × 250	10"	250	6.8	4-63	65	38
CHS-8 × 270	10 5/8"	270	6.0	4-65	65	30
CHS-8 × 300	11 5/8"	300	7.5	4-82	120	55
CHS-8 × 350	13 3/4"	350	7.5	4-90	120	55
CHS-8 × 370	14 1/4"	370	7.5	4-98	120	55
CHS-8 × 400	15 3/4"	400	7.5	4-105	120	55
CHS-8 × 450	17 3/4"	450	7.5	4-118	120	55
CHS-8 × 500	19 1/16"	500	7.5	4-150	120	55
CHS-8 × 750	29 9/16"	750	7.5	4-220	120	55
CHS-9 × 450	17 3/4"	450	9.0	4-118	175	80
CHS-9 × 530	20 3/4"	530	9.0	8-155	175	80
CHS-9 × 550	21 1/16"	550	9.0	8-160	175	80
CHS-9 × 650	25 9/16"	650	9.0	8-190	175	80
CHS-9 × 700	27 1/2"	700	9.0	10-205	175	80
CHS-9 × 760	30"	760	9.0	10-225	175	80
CHS-9 × 920	36 1/4"	920	9.0	10-265	175	80
CHS-9 × 1020	40 1/8"	1020	9.0	10-295	175	80
CHS-9 × 1150	45 1/4"	1150	9.0	10-310	175	80
CHS-9 × 1210	47 3/4"	1210	9.0	10-340	175	80
CHS-9 × 1350	53"	1350	9.0	10-380	175	80
CHS-10 × 450	17 3/4"	450	10.0	10-125	200	91
CHS-10 × 500	19 1/16"	500	10.0	12-150	200	91
CHS-12 × 300	11 5/8"	300	12.7	12-82	250	114
CHS-12 × 400	15 3/4"	400	12.7	12-105	250	114
CHS-12 × 540	21 1/4"	540	12.7	14-155	250	114
CHS-12 × 650	25 9/16"	650	12.0	14-190	250	114
CHS-12 × 750	29 9/16"	750	12.0	10-220	250	114
CHS-12 × 780	30 3/4"	780	12.7	14-230	250	114
CHS-13 × 540	21 1/4"	540	13.0	14-155	250	114