

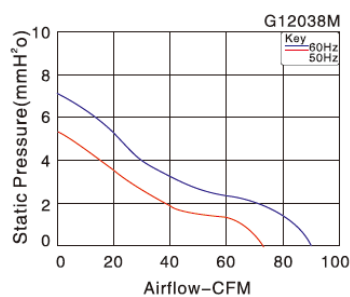


尺寸 Size: 120mmx120mmx38mm
 风量 Airflow: 130-166 m³/hr
 76-98CFM
 重量 Weight: 480g
 噪音 Noise: 39-48dBA
 风叶 Impeller Material: PBT Thermoplastic Black, UL94-V0
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#22 UL 1569(Optional)
 马达 Motor: Shaded Pole Induction Motor
 温度范围 Operating Temperature: -10°C~+65°C

| Model (型号) | Bearing System (轴承型式) | Voltage VAC (电压) | Freq. Hz (频率) | Current A (电流) | Power W (功率) | Speed RPM (转速) | Noise dBA (噪音) | Air Flow (风量) | | Phase (相数) | Capacitor (电容) |
|-------------------------|--------------------------|---------------------|------------------|-------------------|-----------------|-------------------|-------------------|---------------|-------|---------------|-------------------|
| | | | | | | | | M3/hr | CFM | | |
| G12038HA,S | Sleeve | 100/125 | 50/60 | 0.4/0.33 | 23/30 | 2600/3000 | 43/48 | 160/166 | 93/98 | 1 | / |
| G12038HA ₂ S | | 200/240 | 50/60 | 0.15/0.12 | 21/18 | 2600/3000 | 43/48 | 160/166 | 93/98 | 1 | / |
| G12038HA ₃ S | | 380/420 | 50/60 | 0.1 | 21 | 2600/3000 | 43/48 | 160/166 | 93/98 | 1 | / |
| G12038HA ₁ B | Ball | 100/125 | 50/60 | 0.4/0.33 | 23/30 | 2600/3000 | 43/48 | 160/166 | 93/98 | 1 | / |
| G12038HA ₂ B | | 200/240 | 50/60 | 0.15/0.12 | 21/18 | 2600/3000 | 43/48 | 160/166 | 93/98 | 1 | / |
| G12038HA ₃ B | | 380/420 | 50/60 | 0.1 | 21 | 2600/3000 | 43/48 | 160/166 | 93/98 | 1 | / |
| G12038MA,S | Sleeve | 100/125 | 50/60 | 0.22 | 19 | 2200/2600 | 39/44 | 130/160 | 76/94 | 1 | / |
| G12038MA ₂ S | | 200/240 | 50/60 | 0.11 | 19 | 2200/2600 | 39/44 | 130/160 | 76/94 | 1 | / |
| G12038MA ₁ B | Ball | 100/125 | 50/60 | 0.22 | 19 | 2200/2600 | 39/44 | 130/160 | 76/94 | 1 | / |
| G12038MA ₂ B | | 200/240 | 50/60 | 0.11 | 19 | 2200/2600 | 39/44 | 130/160 | 76/94 | 1 | / |

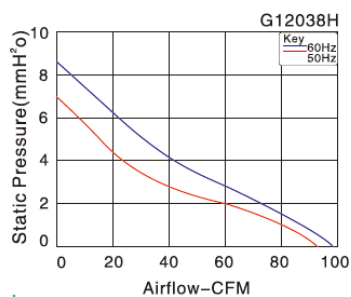

Fan Accessories



JULONG MOTOR
AC DC FANS COOLING FANS

