

EBCHQ

Size:50 × 50 × 15mm

33460

Motor:Brushless DC,auto restart
Impedance&polarity protected

Impeller&Frame:Glassfiber reinforced thermoplastic
PBT UL94V-0



Insulation Resistance:Min. 10M at DC 500V

Dielectric Strength:500VAC/1 sec.Max.leakage
500 micro amp

Permissible Temp.Range:Ball Bearing -20°C~+75°C
Sleeve Bearing -10°C~+50°C

Safety:UL>CUL>CE

Life Expectancy at 40°C:Ball Bearing 50000 hours
Sleeve Bearing 30000 hours

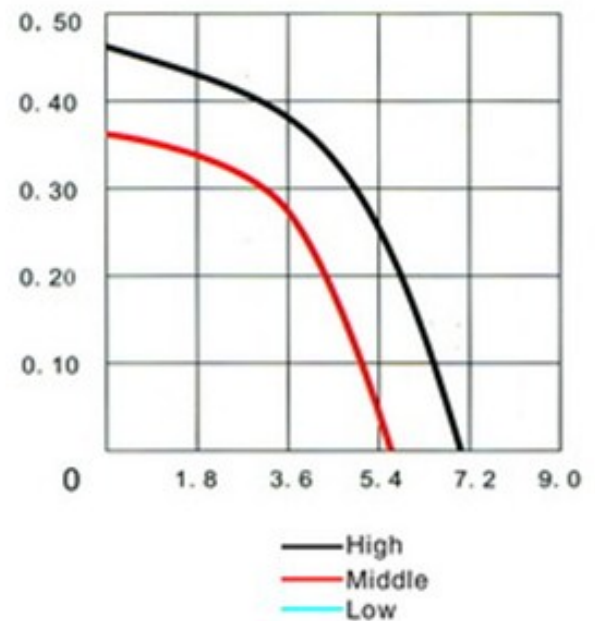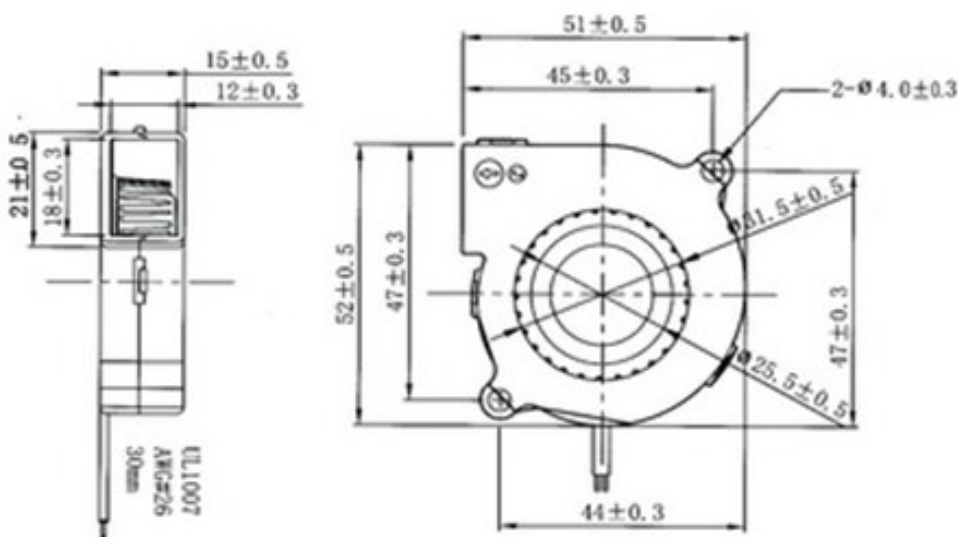

Model	Rated Voltage (VDC)	Startup Voltage (VDC)	Current Amp (A)	Speed (rpm)	Air Flow (CFM)	Static Pressure (Inch-H2O)	Noise Level (dB-A)	Weight (g) (重量)
33460	24.00	10.00	0.07	5000	5.55	0.36	25	30.00