

EBCHQ

Size: 120 × 120 × 32mm

33470

Motor: Brushless DC, auto restart
Impedance & polarity protected

Impeller & Frame: Glassfiber reinforced thermoplastic
PBT UL94V-0



Insulation Resistance: Min. 10M at DC 500V

Dielectric Strength: 500VAC/1 sec. Max. leakage
500 micro amp

Permissible Temp. Range: Ball Bearing -20°C ~ +75°C
Sleeve Bearing -10°C ~ +50°C

Safety: UL > CUL > CE

Life Expectancy at 40°C: Ball Bearing 50000 hours
Sleeve Bearing 30000 hours

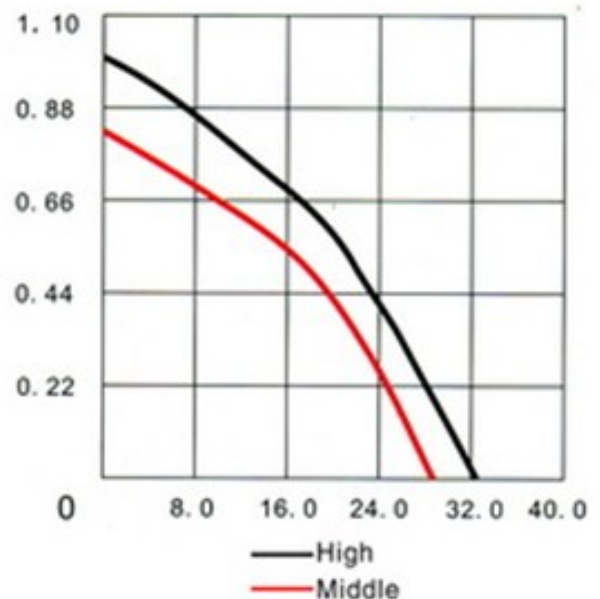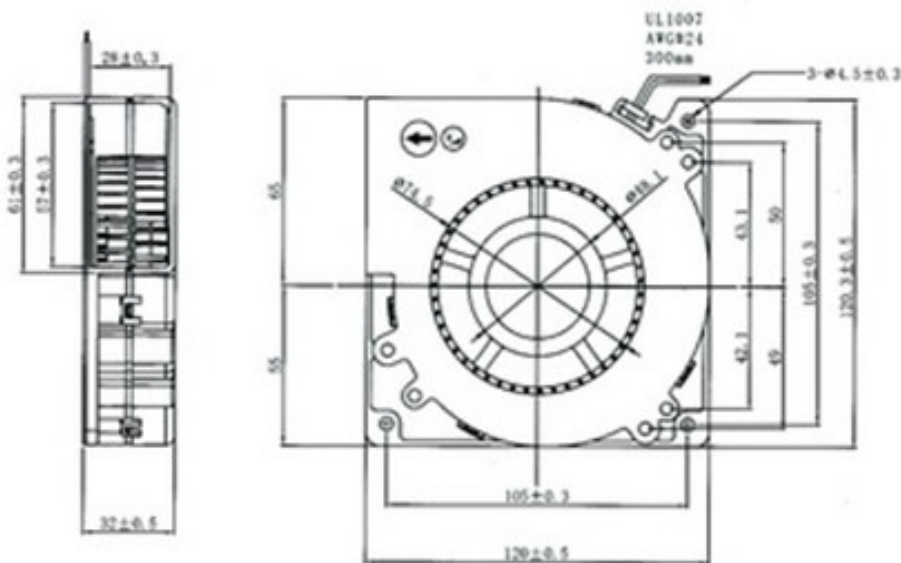

Model	Rated Voltage (VDC)	Startup Voltage (VDC)	Current Amp (A)	Speed (rpm)	Air Flow (CFM)	Static Pressure (Inch-H2o)	Noise Level (dB-A)	Weight (g)
33470	24.00	10.00	0.38	2400	29.00	0.84	46	278.00