



● VK-20

● VK-08



■ Character

Using compressed air as the power to driven stainless ball. The round of the ball could producing frequency vibrations. So that brings the parts to vibrations. And have the function of mixing.

Within a certain range, the frequency could be regulated by the pressure of the air.



It could be used in the light manufacturing such as food, drink, medicine etc and also in the machinery industry.

● Ordering Code

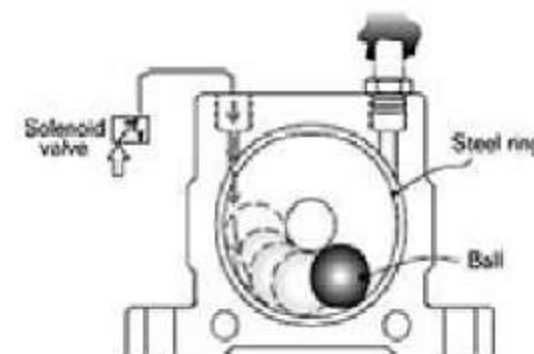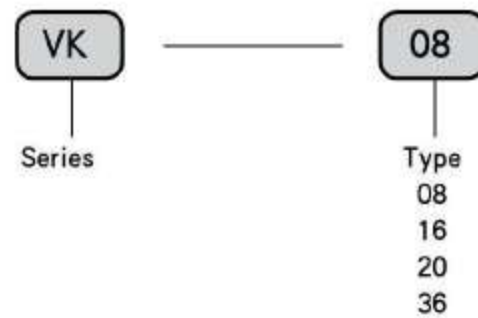

■ Technical Parameter

Type	VK08	VK16	VK20	VK36
Applicable Medium	Filtrate compress Air (Lubrication or No-Lubrication)			
Design	Steel ball ratary acting			
Install Method	Dos shell 2- Φ9 hole			
Note	Pay attention the showout with entrance and exit of pipeline, not reverse installment			
Pressure operated	0.1 ~ 0.8 Mpa ( 14.5 ~ 116Psi)			

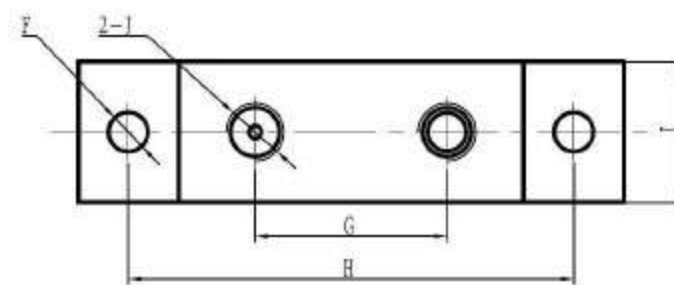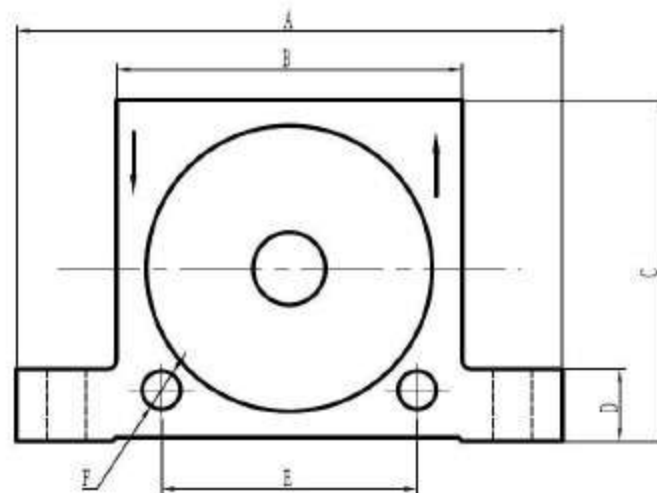

■ Figure Dimension

REFER.	Type	A	B	C	D	E	F	G	H	I	J
87501	VK-08	86	51	50	12	38.5	φ 6.5	27	68	21	G1/4
87502	VK-16	113	66	65.5	17	50	φ 9	40	90	28	G1/4
87503	VK-20	128	84	80	17	61	φ 9	55	105	38	G1/4
87504	VK-36	161	105	100	21	80	φ 11	72	130	50	G3/8