

# Enclosure Thermostat VTS-Series

Rainbow

Ver 1.0



## Key Features


- ◎ Mainly used for hot water boiler
- ◎ Protective tube type (SW type) / General type (S type)
- ◎ Built-in TS Series
- ◎ Temperature range 0°C to 320°C
- ◎ RoHS Certification / Compliance with REACH
- ◎ Used in various applications
  - Hot Water Boiler
  - Fan Control
  - Water Circulating Pump

## Specification

RoHS

Model	Temp Range	Ratings	Bulb Dimension	Switch Action	Accuracy	DIFF.
VTS-050S	0°C~50°C	20A/250V	Ø5.8 X 127mm	SPST/SPDT	±2°C	2±1°C
VTS-090SW	0°C~90°C	20A/250V	Built-in type	SPST/SPDT	±3°C	3±1°C
VTS-120S	0°C~120°C	20A/250V	Ø5.0 X 106mm	SPST/SPDT	±3°C	3±1.5°C
VTS-120SW	0°C~120°C	20A/250V	Built-in type	SPST/SPDT	±3°C	3±1.5°C
VTS-320S	50°C~320°C	20A/250V	Ø3.0 X 144mm	SPST/SPDT	±11°C	7±4°C

## Drawing

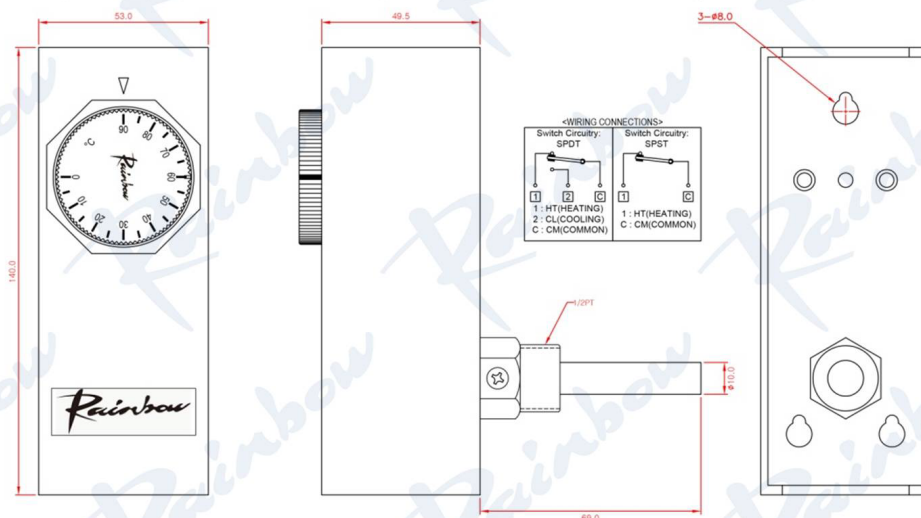

Rainbow

HEAD OFFICE & FACTORY  
 (주)레인보 / RAINBOW ELECTRONICS CO.,LTD.  
 303-204, 397, Seokcheon-ro, Bucheon-si, KOREA  
 TEL : 82-32-624-2288 / FAX : 82-32-624-2299

CHINA OFFICE & FACTORY  
 青岛来仁宝电子有限公司 / QINGDAO RAINBOW  
 18, Huanghe Road, Laixi, Qingdao, CHINA  
 TEL : 86-0532-8849-3930 / FAX : 86-0532-8849-3932