



Size:110mmx110mmx25mm

Airflow:70~100m³/hr

41~59CFM

Weight:304g

Noise:30~41dBA

Impeller:PBT Thermoplastic Black,UL94-VO




Frame:Aluminum Alloy

Terminals:0.5mm

Lead Wire:AWG#22 UL 1007(Optional)

Motor:Shaded Pole Induction Motor

Operation Temperature:- 10°C~+65°C

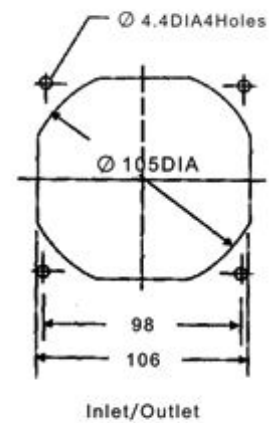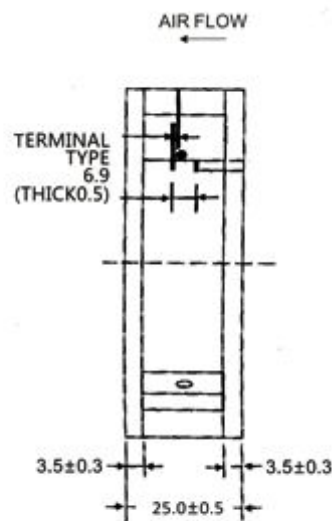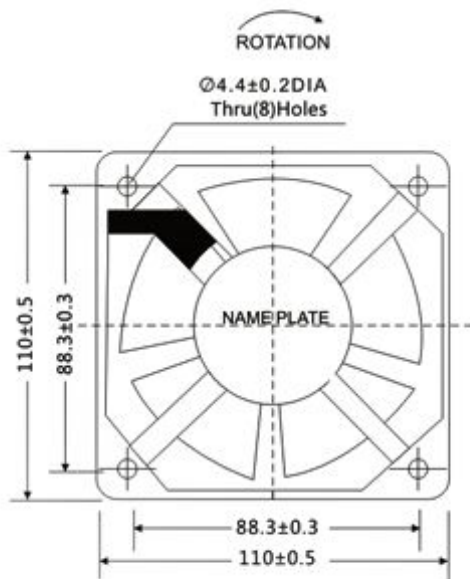

Model	Voltage VAC	Freq. Hz	Current: A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor
							M3/hr	CFM		
HB11025HA ₁ S(B)	100~125	50/60	0.2	18	2200/2500	34/40	84/100	49/59	1	/
HB11025HA ₂ S(B)	200~240	50/60	0.1	18	2200/2500	35/41	84/100	49/59	1	/
HB11025MA ₁ S(B)	100~125	50/60	0.16	16	1800/2300	30/35	70/84	41/49	1	/
HB11025MA ₂ S(B)	200~240	50/60	0.8	16	1800/2300	30/35	70/84	41/49	1	/

