


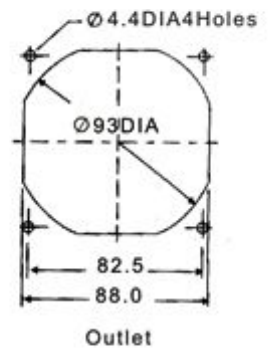
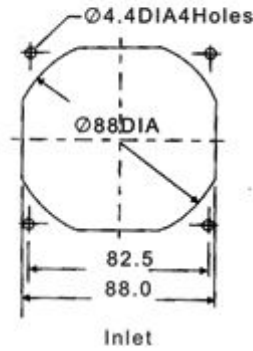
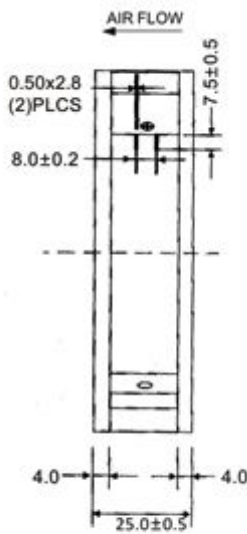


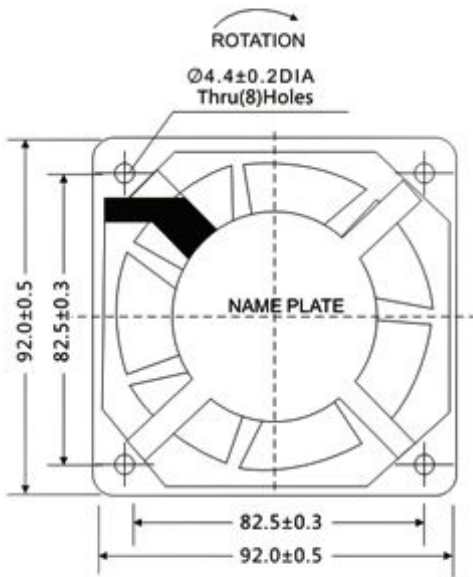

Size: 92mmx92mmx25mm
Airflow: 37~58m³/hr
22~34CFM
Weight: 268g
Noise: 28~40dBA
Impeller: PBT Thermoplastic Black, UL94-VO
Frame: Aluminum Alloy
Terminals: 0.5mm
Lead Wire: AWG#22 UL 1007(Optional)
Motor: Shaded Pole Induction Motor
Operation Temperature: -10°C~+65°C

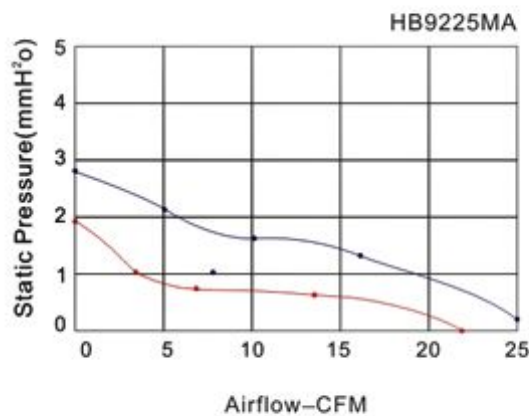

Model	Voltage VAC	Freq. Hz	Current: A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor
							M3/hr	CFM		
HB9225HA,S(B)	100~125	50/60	0.14	13	2300/2800	34/40	47/58	28/34	1	/
HB9225HA,S(B)	200~240	50/60	0.07	13	2300/2800	34/40	47/58	28/34	1	/
HB9225MA,S(B)	100~125	50/60	0.14	13	1800/2300	28/35	37/45	22/26	1	/
HB9225MA,S(B)	200~240	50/60	0.07	13	1800/2300	28/35	37/45	22/26	1	/

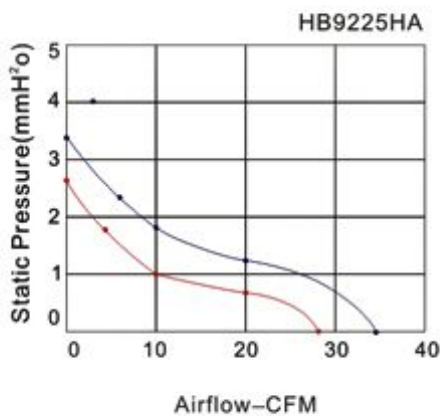

Key
 — 60Hz
 — 50Hz