

LEIPOLE FKL6623 | 204 X 204 MM FAN-FILTER

CUT-OUT 177 X 177 MM

LEIPOLE tool-free assembly of fan and filter units. Reversible air flow direction. Click-in fitting with no screws required. Durable, practical, robust, space-saving with minimum installation depth, provides greater flexibility for space. Our filter mat compliance to European Union EN779 Class G2 is available for sales for your maintenance needs.

Protection category: IP 54 rating

Color: RAL 7035 and RAL 7032

Retardent rating: UL94-V2

Case material: ABS plastic louver

Certification: CE, CQC, UL, RoHS


LEIPOLE Standard Fan Filter FKL6623.230 | FKL6623.115 | FKL6623.024

Standard fan and filter	FKL6623.230	FKL6623.115	FKL6623.024
Rated voltage / frequency (V/Hz)	230V 50/60	115V 50/60	24 VDC
Air flow, free blowing (m³/h)	105/120		
Air flow with exit filters (m³/h)	1 x FKL6623.300 : 71/82 2 x FKL6623.300 : 85/98		
Axial fan	Automatically shield pole motor		DC motor
Rated current (A)	0.12/0.10	0.24/0.23	0.30
Power (W)	19/14	18/15	3.5
Noise level (dB)	43/50		
Operating temperature (°C)	- 10 to 55		
Service life (hours)	70,000 at 25°C / 50,000 at 50°C		
Exit filter	FKL6623.300		
Remarks	For special voltage needs, please call TRU for enquiry.		


Fans and filters
FKL 6623....




Fans and filters
FKL 6623.230

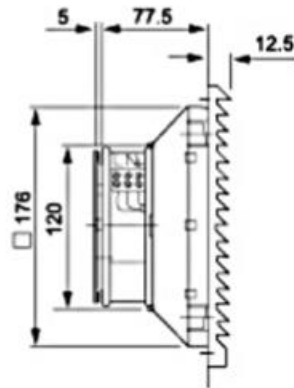

Exit filter
FKL 6623.300

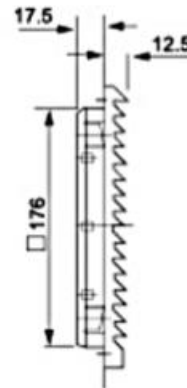

Drawing
FKL 6623....

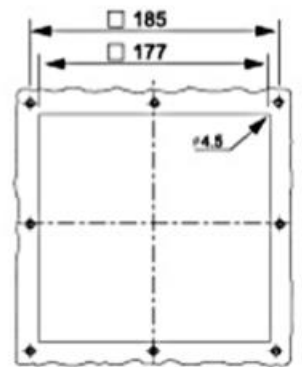

Performance
FKL 6623....

