

## BPR02K

**Product** Potentiometer

**Dia** 22 mm

**Dielectric Strength  
(Contact-Contact)** 1750 Vrms

**Isolation Resistance** 10 MΩ min. (500V DC)

**Operating Temperature** -15 / + 80 °C

**Pollution Degree** 3

**Protection Degree** IP65

**Cable Section** 0.75-1.5 mm<sup>2</sup>

**Screw Torque** 1,5 Nm

**Maximum Current** 27,40 mA

**Maximum Power** 1,5 W (70°C)

**Resistive Value** 2,2 kΩ

**Spin Angle** 270°

**Production Time** 31.12.1899 00:00:00

**Serial** B Series Plastic

**Specifications** Non-flammable V0 PA6.6


Variety of impedances

IP65 protection from front side


**Standards / Certificates** IEC 60393-1





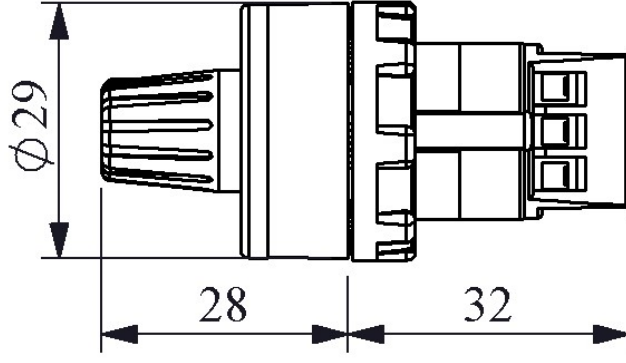

Montaj Ölçüsü  $\phi 22.4 \pm 0.2$  mm



Devre Şeması

