



BPR01K

Product Potentiometer

Dia 22 mm

Dielectric Strength (Contact-Contact) 1750 Vrms

Isolation Resistance 10 MΩ min. (500V DC)

Operating Temperature -15 / + 80 °C

Pollution Degree 3

Protection Degree IP65

Cable Section 0.75-1.5 mm²

Screw Torque 1,5 Nm

Maximum Current 38,70 mA

Maximum Power 1,5 W (70°C)

Resistive Value 1 kΩ

Spin Angle 270°

Production Time 31.12.1899 00:00:00

Serial B Series Plastic


Specifications Non-flammable V0 PA6.6

Variety of impedances


IP65 protection from front side

Standards / Certificates IEC 60393-1



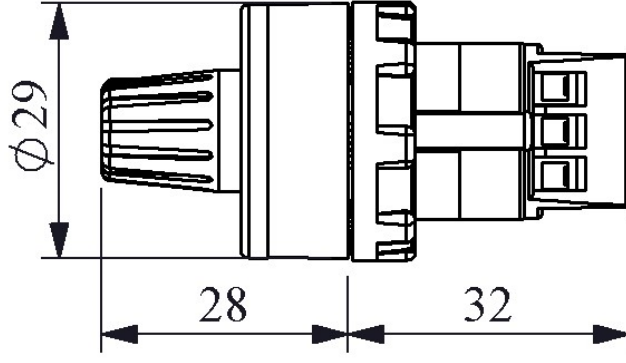

Montaj Ölçüsü $\phi 22.4 \pm 0.2$ mm



Devre Şeması

