




GZM4

For R4N, T-R4


Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 75 x 27 x 61(82) mm 
 Four poles
 6 A, 300 V AC



Connection diagram



Dimensions

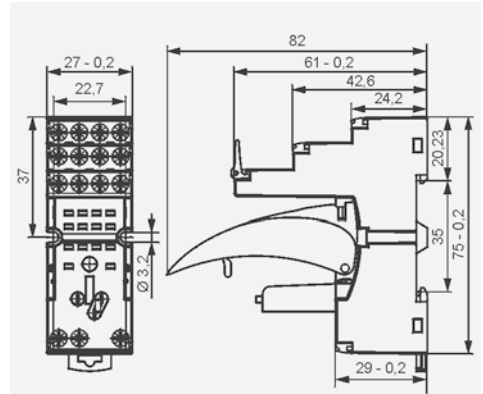


Accessories

GZT4-0035 Module type M...

GZMB4



For R4N, T-R4

Spring terminals
 Max. cross section of the cables:
 1 x 0,2...1,5 mm²
 (1 x 24...16 AWG)
 Stripping length: 9...11 mm


35 mm rail mount acc. to EN 60715
 95 x 31 x 42,5(80) mm 
 Four poles
 10 A, 300 V AC




Connection diagram

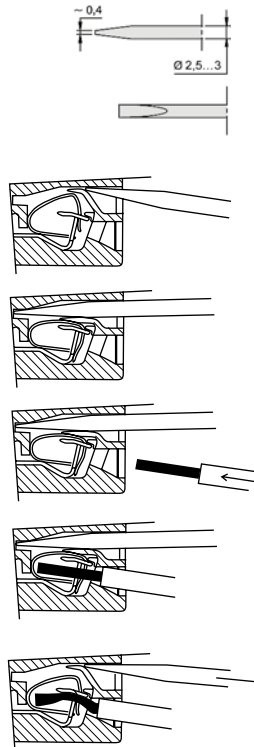

Dimensions

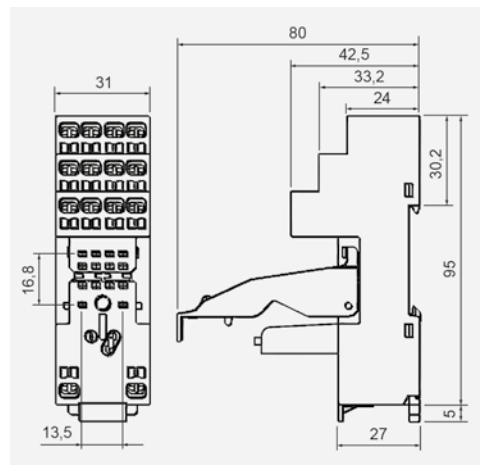


The drawings present the sequence of operations in course of inserting wires to the spring terminal, and the recommended screwdriver to be used for opening of case springs, comply with the DIN 5264 FORM "A".

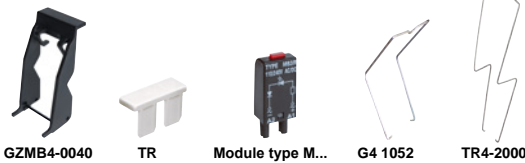

Accessories


Wire connection




GZ4

For R4N


Screw terminals
 Max. tightening moment for the terminal: 0,7 Nm
 35 mm rail mount acc. to EN 60715 or on panel mounting
 66,4 x 29,5 x 29 mm
 Four poles
 10 A, 300 V AC



Connection diagram



Dimensions

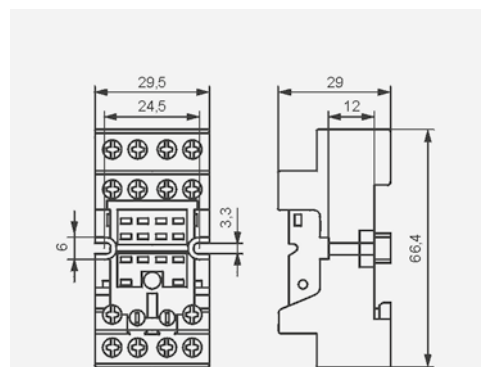

Accessories

G4 1052

 Mounting and sub-assemblies of accessories in the socket - see page 375. Signalling / protecting modules type M... - see page 376.  In the bracket the height of socket with retainer / retractor clip is shown.  For R4N relays: G4 1052, GZT4-0040, GZMB-0040, GZT4-0035, TR, module type M...; for T-R4 relays: TR4-2000, GZT4-0035, TR.